

AL-Series Enclosures

Protect your Equipment in any condition


Features

- Weatherproof Nema 4X
- Powder Coated Aluminum
- Integrated Pole / Wall Mount
- Lockable Door
- Neoprene Gasket



Enclosure Specs	UAL2-			UAL5-		
Enclosure Size (Inches)	H	W	D	H	W	D
	19"	16"	14"	30"	22"	13"
Enclosure Weight	13 LBS			33 LBS		
Material	Powder Coated Aluminum					
Lockable	Lockable with Padlock (Padlock not Included)					
Mounting System	Integrated Mounting System (Included)					
Recommended Pole Size	3" to 5.5" Schedule 40 Ridged Metal Pole					
Battery Charge Controller	12 VDC @ 24 Amp or 24 VDC @ 12Amp, Preinstalled Advanced Charge Algorithm based on Zone with 3 Stage (Bulk - Absorption - Float)					
* Lithium Battery Capacity	240 Ah Equal to ~ 480 Ah of SLA			480 Ah Equal to ~ 960 Ah of SLA		
SLA Battery Capacity	(2) 100 Ah Batteries			(2) 250 Ah Batteries		
Operating Temp	-40° C to +60° C (-40° F to +140° F) Batteries can lose up to 50% of power in temperatures below -0° F					


Included with Various Vorp Plug & Play Kits

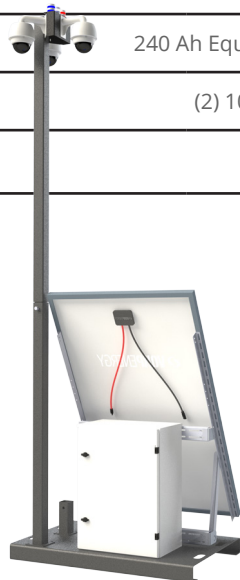

Mobile Skid



Remote Power



1200W Skid



UPS Backup

Vorp Energy

4774 South Hwy 191
Rexburg, ID 83440
Phone : + (208) 904-0424
E-Mail : support@vorpenergy.com